

**Cartuccia ad uso civile e industriale per il trattamento di acque primarie, potabili e non.
Filter cartridges for civil and industrial employ. Suitable for drinkable and not drinkable water treatment.**

FA


Caratteristiche Tecniche :

- Standard: \dot{R} est.61mm (2,4") \dot{R} int.28mm (1,1")
- Filo in PP avvolto a norme FDA e CEE
- Temperatura massima 60°C
- Supporto in PP a norme FDA e CEE
- Per contenitori standard
- Alta capacità di trattenere i contaminati
- Portate elevate con minime perdite di carico
- Compatibili con un'ampia gamma di agenti chimici
- Fibre e anime rispondenti a norme FDA e CEE per alimenti
- Lunga durata e contenuto costo di esercizio

Technical features :

- Standard: \dot{R} ext:61mm (2,4") \dot{R} in: 28mm (1,1")
- Wound Polypropilene (FDA and CEE approved)
- Maximum temperature 60°C
- PP support (FDA and CEE approved)
- For standard housing
- High pollutant retaining capacity
- High rate of flow with minimum drop in pressure/flow resistance
- Compatible with a wide variety of chemical agents
- Fibres and core in accordance with the FDA and EEC standards for foodstuffs
- Durable, low running cost

Codice	Modello	Microns	Dimensioni \dot{R} H		Kg per Confezione	Pezzi per confezione
Code	Model	Microns	Dimensions \dot{R} H		Kg for packing	Pieces for packing
OCFMMI001	FA MINI	1	50	122	1,5 - 3,5	32 - 192
OCFMMI005	FA MINI	5	50	122	1,5 - 3,5	32 - 192
OCFMMI010	FA MINI	10	50	122	1,5 - 3,5	32 - 192
OCFMMI025	FA MINI	25	50	122	1,5 - 3,5	32 - 192
OCFMMI050	FA MINI	50	50	122	1,5 - 3,5	32 - 192
OCFA04001	FA 4"	1	61	102	3,0 - 8,0	48 - 120
OCFA04005	FA 4"	5	61	102	3,0 - 8,0	48 - 120
OCFA04010	FA 4"	10	61	102	3,0 - 8,0	48 - 120
OCFA04025	FA 4"	25	61	102	3,0 - 8,0	48 - 120
OCFA04050	FA 4"	50	61	102	3,0 - 8,0	48 - 120
OCFA05001	FA 5"	1	61	133	3,5 - 7,0	48 - 96
OCFA05005	FA 5"	5	61	133	3,5 - 7,0	48 - 96
OCFA05010	FA 5"	10	61	133	3,5 - 7,0	48 - 96
OCFA05025	FA 5"	25	61	133	3,5 - 7,0	48 - 96
OCFA05050	FA 5"	50	61	133	3,5 - 7,0	48 - 96
OCFA07001	FA 7"	1	61	177	4,5 - 6,5	24 - 72
OCFA07005	FA 7"	5	61	177	4,5 - 6,5	24 - 72
OCFA07010	FA 7"	10	61	177	4,5 - 6,5	24 - 72
OCFA07025	FA 7"	25	61	177	4,5 - 6,5	24 - 72
OCFA07050	FA 7"	50	61	177	4,5 - 6,5	24 - 72
OCFA09001	FA 9"	1	61	250	3,5 - 6,5	24 - 48
OCFA09005	FA 9"	5	61	250	3,5 - 6,5	24 - 48
OCFA09010	FA 9"	10	61	250	3,5 - 6,5	24 - 48
OCFA09025	FA 9"	25	61	250	3,5 - 6,5	24 - 48
OCFA09050	FA 9"	50	61	250	3,5 - 6,5	24 - 48
OCFA20001	FA 20"	1	61	516	7,0	24
OCFA20005	FA 20"	5	61	516	7,0	24
OCFA20010	FA 20"	10	61	516	7,0	24
OCFA20025	FA 20"	25	61	516	7,0	24
OCFA20050	FA 20"	50	61	516	7,0	24
OCFA30001	FA 30"	1	61	762	14,5	30
OCFA30005	FA 30"	5	61	762	14,5	30
OCFA30010	FA 30"	10	61	762	14,5	30
OCFA30025	FA 30"	25	61	762	14,5	30
OCFA30050	FA 30"	50	61	762	14,5	30

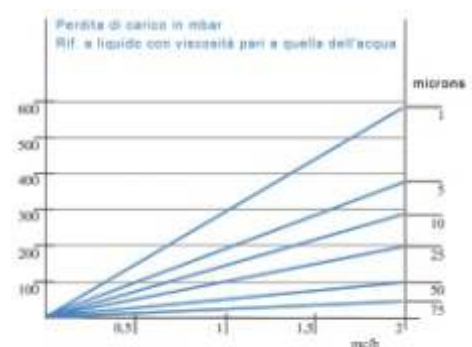

Per \dot{R} 55mm aggiungere R in coda al codice Es.:OCFA04001R
For \dot{R} 55mm add R at the end of the code Es.:OCFA04001R

Importőr, Kis- és Nagykereskedés, Szerviz



VL

SZIVATTYÚJAVÍTÓ

IP. KER. SZOLG.BT.

H-2225 Üllő, Bimbó u. 4. Tel/fax.:06/29-320-150, 29-321-160

www.vlbt.hu info@vlbt.hu